



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 296 410 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
26.03.2003 Bulletin 2003/13

(51) Int Cl.7: **H01Q 5/00**, H01Q 1/24,
H01Q 9/04, H01Q 1/36

(21) Application number: **02018601.1**

(22) Date of filing: **19.08.2002**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Lehtola, Antero**
20810 Turku (FI)

(74) Representative:
Leson, Thomas Johannes Alois, Dipl.-Ing.
Tiedtke-Bühling-Kinne & Partner GbR,
TBK-Patent,
Bavariaring 4
80336 München (DE)

(30) Priority: **19.09.2001 US 956753**

(71) Applicant: **Nokia Corporation**
02150 Espoo (FI)

(54) Internal Multi-Band Antenna

(57) A radio antenna including a first shorted patch having a first resonance frequency (GSM1800), a second shorted patch connected to the first shorted patch for sharing a first feed point, and a third shorted patch separately having a second feed point. A first switch and a second switch connect between the ground and, respectively, the first and the second feed points. To cause the second and third shorted patches to produce, re-

spectively, a second (E-GSM900) and a third resonance frequency (PCS1900), the first switch is operated in the open position while the second switch is operated in the closed position. To cause the first and third shorted patches to produce, respectively, a third frequency and a fourth resonance frequency (UMTS), the first switch is operated in the closed position while the second switch is operated in the open position.

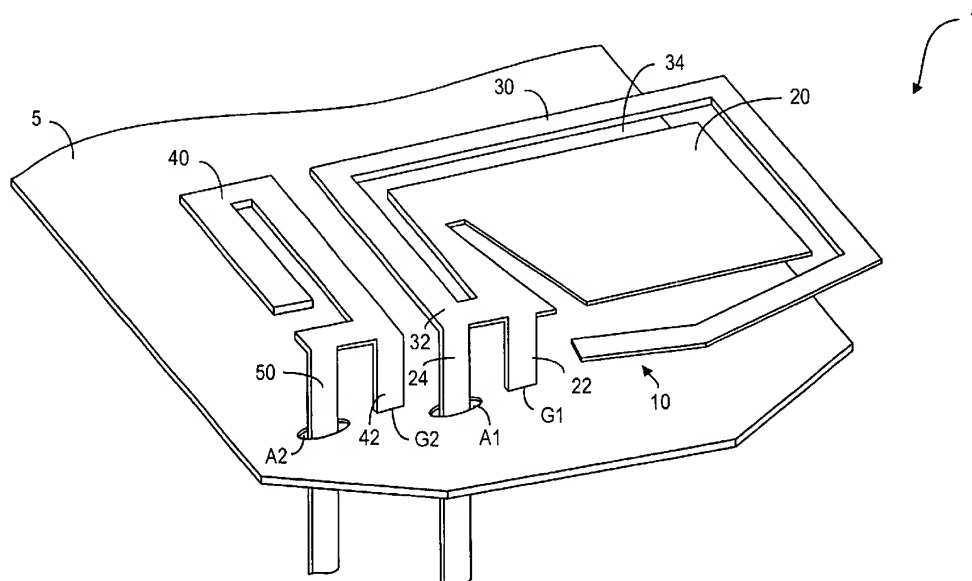


FIG. 1

Description

Field of the Invention

[0001] The present invention relates generally to a radio antenna and, more specifically, to an internal multi-band antenna for use in a hand-held telecommunication device, such as a mobile phone.

Background of the Invention

[0002] The development of small antennas for mobile phones has recently received much attention due to size reduction of the handsets, requirements to keep the amount of radio-frequency (RF) power absorbed by a user below a certain level regardless of the handset size, and introduction of multi-mode phones. It would be advantageous, desirable and even necessary to provide internal multi-band antennas to be disposed inside a handset body, and these antennas should be capable of operating in multiple systems such as E-GSM900 (880 MHz - 960 MHz), GSM1800 (1710 MHz - 1880 MHz), PCS1900 (1850 MHz - 1990 MHz) and UMTS (1900 MHz - 2170 MHz). Shorted patch antennas, or planar inverted-F antennas (PIFAs), have been used to provide two or more resonance frequencies. For example, *Liu et al.* (Dual-frequency planar inverted-F antenna, IEEE Transaction on Antennas and Propagation, Vol.45, No.10, October 1997, pp. 1451-1458) discloses a dual-band PIFA; *Pankinaho* (U.S. Patent No. 6,140,966) discloses a double-resonance antenna structure for several frequency ranges, which can be used as an internal antenna for a mobile phone; *Isohata et al.* (EP 0997 974 A1) discloses a planar antenna having a relatively low specific absorption rate (SAR) value; and *Song et al.* (Triple-band planar inverted-F antenna, IEEE Antennas and Propagation International Symposium Digest, Vol.2, Orlando, Florida, July 11-16, 1999, pp.908-911) discloses a triple-band PIFA. As mobile phones capable of operating at the UMTS frequencies will become a reality in near future, it is advantageous and desirable to provide an antenna structure capable of operating in the UMTS frequencies as well as the GSM frequencies.

Summary of the Invention

[0003] According to first aspect of the present invention, a multi-band radio antenna structure for use in a hand-held telecommunication device comprises:

a ground plane;

a sub-antenna structure comprising:

a first radiating element formed of a first electrically conducting area having a first resonance frequency, wherein the first electrically conducting area has a first end connected to

the ground plane for grounding the first radiating element, and wherein the first radiating element has a first feed-point for feeding located adjacent to the first end; and

a second radiating element formed of a second electrically conducting area disposed adjacent to the first electrically conducting area, wherein the second electrically conducting area has a second end electrically connected to the first end of the first electrically conducting area for grounding the second radiating element and for sharing the first feed-point for feeding;

a third radiating element formed of a third electrically conducting area adjacent to the sub-antenna structure, wherein the third electrically conducting area has a third end connected to the ground plane for grounding the third radiating element, and wherein the third radiating element has a second feed-point for feeding located adjacent to the third end;

a first switching device, operable either in an open position or in a closed position, connecting between the first feed-point and the ground plane; and

a second switching device, operable either in an open position or in a closed position, connecting between the second feed-point and the ground plane, wherein

when the second switching device is operated in the closed position, thereby grounding the second feed-point and the first switching device is operated in the open position for enabling the first feed-point feeding, the second radiating element has a second resonance frequency substantially lower than the first resonance frequency and the third radiating element has a third resonance frequency generally higher than the first resonance frequency, and when the first switching device is operated in the closed position, thereby grounding the first feed-point and second switching device is operated in the open position for enabling the second feed-point feeding, the third radiating element has a fourth resonance frequency generally higher than the third resonance frequency.

[0004] According to the present invention, when the first switching device is operated in the closed position and the second switching device is operated in the open position, the first radiating element has a fifth resonance frequency substantially equal to the third resonance frequency.

[0005] According to the present invention, the first resonance frequency is substantially in a frequency range of 1710 MHz to 1880 MHz, the second resonance frequency is substantially in a frequency range of 880 MHz to 960 MHz, the third resonance frequency is substantially in a frequency range of 1850 MHz to 1990 MHz, and the fourth resonance frequency is substan-

tially in a frequency range of 1920 MHz to 2170 MHz.

[0006] According to present invention, the third electrically conducting area is adjacent to the first electrically conducting area or adjacent to the second electrically conducting area.

[0007] According to the present invention, the first and the second radiating elements are planar radiating elements located substantially on a common plane.

[0008] According to the present invention, the first, second and third radiating elements are planar radiating elements located substantially on a common plane.

[0009] According to the present invention, the first, second and third radiating elements are planar radiating elements but some or all of the radiating elements can be folded such that each of the folded radiating elements is located in two or more intersecting planes.

[0010] According to the second aspect of the present invention, a method of achieving at least four resonance frequencies in a multi-band antenna structure including:

a ground plane;

a sub-antenna structure comprising:

a first radiating element formed of a first electrically conducting area having a first resonance frequency, wherein the first electrically conducting area has a first end connected to the ground plane for grounding the first radiating element, and wherein the first radiating element has a first feed-point for feeding located adjacent to the first end; and
a second radiating element formed of a second electrically conducting area disposed adjacent to the first electrically conducting area, wherein the second electrically conducting area has a second end electrically connected to the first end of the first electrically conducting area for grounding the second radiating element and for sharing the first feed-point for feeding;

a third radiating element formed of a third electrically conducting area adjacent to the sub-antenna structure, wherein the third electrically conducting area has a third end connected to the ground plane for grounding the third radiating element, and wherein the third radiating element has a second feed-point for feeding located adjacent to the third end, said method comprising the steps of:

providing a first switching device, operable either in an open position or in a closed position, connecting between the first feed-point and the ground plane;

providing a second switching device, operable either in an open position or in a closed position, connecting between the second feed-point and the ground plane; and

setting the second switching device in the

closed position, thereby grounding the second feed-point and the first switching device in the open position for enabling the first feed-point feeding, so as to cause the second radiating element to produce a second resonance frequency substantially lower than the first resonance frequency and the third radiating element to produce a third resonance frequency generally higher than the first resonance frequency, or setting the first switching device in the closed position, thereby grounding the first feed-point and second switching device in the open position for enabling the second feed-point feeding so as to cause the third radiating element to produce a fourth resonance frequency generally higher than the third resonance frequency.

[0011] According to the present invention, when the first switching device is set in the closed position and the second switching device is set in the open position, the first radiating element to produce a fifth resonance frequency substantially equal to the third resonance frequency.

[0012] The present invention will become apparent upon reading the description taking in conjunction with Figures 1 to 3b.

Brief Description of the Drawings

[0013]

Figure 1 is an isometric view illustrating the radiating elements of the multi-band antenna structure, according to the preferred embodiment of the present invention.

Figure 2 is a diagrammatic representation illustrating the switching devices connected between the feed points and the ground plane.

Figure 3a is a diagrammatic representation illustrating one switching configuration of the multi-band antenna structure, according to the present invention.

Figure 3b is a diagrammatic representation illustrating another switching configuration of the multi-band antenna structure.

Detailed Description

[0014] Figure 1 shows the radiating elements of the multi-band antenna structure **1**, according to the preferred embodiment of the present invention. As shown, the antenna structure **1** has a ground plane **5**, a sub-antenna structure **10** having a first radiating element **20**, a second radiating element **30** and a third radiating element **40**. In the sub-antenna structure **10**, the first radiating element **20** is substantially a planar, electrically conducting element having a first end **22** for grounding the first radiating element **20** to the ground plane **5** at a

grounding point **G1**. As such, the first radiating element **20** is a short-circuited patch having a first resonance frequency. Preferably, the first resonance frequency is substantially in the range of 1710 MHz to 1880 MHz. Adjacent to the first end **22**, a feed line **24** is provided to the first radiating element **20** for feeding. The second radiating element **30** is substantially a strip of planar electrically conducting area surrounding the first radiating element **20**, leaving a gap **34** therebetween. The second radiating element **30** has second end **32**, which is connected to first end **22** of the first radiating element **20** for grounding the second radiating element **30**. As such, the second radiating element **30** becomes a short-circuited patch and, at the same time, the second radiating element **30** can share the feed line **24** for feeding. The third radiating element **40** is physically separated from the sub-antenna structure **10** except that they are connected through the ground plane **5**. As shown, the third radiating element **40** is substantially a planar electrically conducting element having a third end **42** connected to the ground plane **5** for grounding the third radiating element **40** to the ground plane **5** at a ground point **G2**. As such, the third radiating element **40** is also a short-circuited patch. Adjacent to the third end **42**, a feed line **50** is provided to the third radiating element **40** for feeding.

[0015] As shown in Figure 1, all the radiating elements **20**, **30**, **40** are located substantially on a common plane. However, it is possible that only two of the radiation elements **20**, **30**, **40** are located on the same plane, or each of them is located on a different plane. Furthermore, one or more of these radiating elements can be folded so that each of the folded elements can be located on different planes. The feed lines **24** and **50** are shown to pass through the ground plane **5** via apertures **A1** and **A2** in order to connect to their respective radio-frequency modules. However, it is not necessary for the feed lines **24** and **50** to pass through the ground plane, as such, to reach the radio-frequency modules.

[0016] As shown in Figure 2, the feed line **24** is connected to a radio-frequency module **70** for feeding while the feed line **50** is connected to a radio-frequency module **72** for feeding. A switching device **60** is connected between the feed line **24** and the ground plane **5** and a switching device **62** is connected between the feed line **50** and the ground plane **5**. Each of the switching devices **60**, **62** is operable either in an open position or a closed position. As shown in Figure 3a, the switching device **60** is operated in an open position for enabling the feeding of the feed line **24** between the radio-frequency module **70** and the sub-antenna structure **10**, while the switching device **62** is operated in a closed position, thereby grounding the feed line **50** to the ground plane **5**. When the switching devices **60**, **62** are in these positions, the second radiating element **30** has a second resonance frequency substantially lower than the first resonance frequency, and the third radiating element **40** has a third resonance frequency generally

higher than the first frequency. Preferably, the second resonance frequency is substantially in the range of 880 MHz to 960 MHz and the third resonance frequency is substantially in the range of 1850 and 1990 MHz. However, when the switching device **62** is operated in the open position for enabling the feeding of the feed line **50** between the radio-frequency module **72** and the third radiating element **40**, and the switching device **60** is operated in a closed position thereby grounding the feed line **24** to the ground plane **5**, the third radiating element **40** has a fourth resonance frequency generally higher than the third resonance frequency, and the first radiating element **20** has a fifth resonance frequency substantially equal to the third resonance frequency. Preferably, the fourth resonance frequency is substantially in the range of 1920 MHz to 2170 MHz.

[0017] The switch devices **60**, **62** can be PIN diodes, FET switches, MEMS (Micro-Electro Mechanical Systems) switches, or other solid-state switches.

[0018] According to the preferred embodiment of the present invention, all the electrically conducting areas constituting the radiating elements of the antenna structure can be located on a common plane, but they can be located on different planes. The antenna structure can be made more compact by using narrow strips of electrically conducting areas with meandering patterns in two or three dimensions. Furthermore, it is not necessary that the radiating element **30** surrounds the radiating element **20**, as shown in Figure 1.

[0019] The present invention has been disclosed in conjunction with GSM and UMTS frequencies. However, the resonance frequencies can be made higher or lower by changing the size and geometry of the one or more radiating elements. For example, it is possible to use the same antenna as a short range radio link (like Bluetooth) antenna.

[0020] The multi-band radio antenna of the present invention can be used in an electronic device such as a mobile phone, a personal digital assistant device, a portable computer or the like.

[0021] Thus, although the invention has been described with respect to a preferred embodiment thereof, it will be understood by those skilled in the art that the foregoing and various other changes, omissions and deviations in the form and detail thereof may be made without departing from the spirit and scope of this invention.

[0022] A radio antenna including a first shorted patch having a first resonance frequency (GSM1800), a second shorted patch connected to the first shorted patch for sharing a first feed point, and a third shorted patch separately having a second feed point. A first switch and a second switch connect between the ground and, respectively, the first and the second feed points. To cause the second and third shorted patches to produce, respectively, a second (E-GSM900) and a third resonance frequency (PCS 1900), the first switch is operated in the open position while the second switch is operated in the closed position. To cause the first and third shorted

patches to produce, respectively, a third frequency and a fourth resonance frequency (UMTS), the first switch is operated in the closed position while the second switch is operated in the open position.

5

Claims

1. A multi-band radio antenna structure for use in a hand-held telecommunication device comprising:

10

a ground plane;

a sub-antenna structure comprising:

a first radiating element formed of a first electrically conducting area having a first resonance frequency, wherein the first electrically conducting area has a first end connected to the ground plane for grounding the first radiating element, and wherein the first radiating element has a first feed-point for feeding located adjacent to the first end; and

15

20

a second radiating element formed of a second electrically conducting area disposed adjacent to the first electrically conducting area, wherein the second electrically conducting area has a second end electrically connected to the first end of the first electrically conducting area for grounding the second radiating element and for sharing the first feed-point for feeding;

25

30

a third radiating element formed of a third electrically conducting area adjacent to the sub-antenna structure, wherein the third electrically conducting area has a third end connected to the ground plane for grounding the third radiating element, and wherein the third radiating element has a second feed-point for feeding located adjacent to the third end;

35

40

a first switching device, operable between an open position and a closed position, connecting between the first feed-point and the ground plane; and

45

a second switching device, operable between an open position and a closed position, connecting between the second feed-point and the ground plane, wherein

50

when the second switching device is operated in the closed position, thereby grounding the second feed-point and the first switching device is operated in the open position for enabling the first feed-point feeding, the second radiating element has a second resonance frequency substantially lower than the first resonance frequency and the third radiating element has a

55

third resonance frequency generally higher than the first resonance frequency, and when the first switching device is operated in the closed position, thereby grounding the first feed-point, and the second switching device is operated in the open position for enabling the second feed-point feeding, the third radiating element has a fourth resonance frequency generally higher than the third resonance frequency.

2. The multi-band radio antenna of claim 1, wherein when the first switching device is operated in the closed position and second switching device is operated in the open position, the first radiating element has a fifth resonance frequency substantially equal to the third resonance frequency.

3. The multi-band radio antenna structure of claim 1, wherein the first resonance frequency is substantially in a frequency range of 1710 MHz to 1880 MHz

4. The multi-band radio antenna structure of claim 1, wherein the second resonance frequency is substantially in a frequency range of 880 MHz to 960 MHz.

5. The multi-band radio antenna structure of claim 1, wherein the third resonance frequency is substantially in a frequency range of 1850 MHz to 1990 MHz

6. The multi-band radio antenna structure of claim 1, wherein the fourth resonance frequency is substantially in a frequency range of 1920 MHz to 2170 MHz.

7. The multi-band radio antenna structure of claim 1, wherein the third electrically conducting area is adjacent to the first electrically conducting area.

8. The multi-band radio antenna structure of claim 1, wherein the third electrically conducting area is adjacent to the second electrically conducting area.

9. The multi-band radio antenna structure of claim 1, wherein the second electrically conducting area is adjacent to at least two sides of the first electrically conducting area.

10. The multi-band radio antenna structure of claim 1, wherein the second electrically conducting area is adjacent to at least three sides of the first electrically conducting area.

11. The multi-band radio antenna structure of claim 1, wherein the switching devices comprise at least one PIN diode.

12. The multi-band radio antenna structure of claim 1, wherein the switching devices comprise at least one FET switch.

13. The multi-band radio antenna structure of claim 1, wherein the switching devices comprise at least one MEMS switch. 5

14. The multi-band radio antenna structure of claim 1, wherein the switching devices are solid state switches. 10

15. The multi-band radio antenna structure of claim 1, wherein the hand-held telecommunication device is a mobile phone. 15

16. The multi-band radio antenna structure of claim 1, wherein the hand-held telecommunication device is a personal digital assistant device. 20

17. The multi-band radio antenna structure of claim 1, wherein the hand-held telecommunication device is a portable computer. 20

18. A method of achieving at least four resonance frequencies in a multi-band antenna structure including: 25

a ground plane;

a sub-antenna structure comprising: 30

a first radiating element formed of a first electrically conducting area having a first resonance frequency, wherein the first electrically conducting area has a first end connected to the ground plane for grounding the first radiating element, and wherein the first radiating element has a first feed-point for feeding located adjacent to the first end; and 40

a second radiating element formed of a second electrically conducting area disposed adjacent to the first electrically conducting area, wherein the second electrically conducting area has a second end electrically connected to the first end of the first electrically conducting area for grounding the second radiating element and for sharing the first feed-point for feeding; and 50

a third radiating element formed of a third electrically conducting area adjacent to the sub-antenna structure, wherein the third electrically conducting area has a third end connected to the ground plane for grounding the third radiating element, and wherein the third radiating element has a second feed-point for feeding lo- 55

cated adjacent to the third end, said method comprising the steps of:

providing a first switching device, operable between an open position and a closed position, connecting between the first feed-point and the ground plane;

providing a second switching device, operable between an open position and a closed position, connecting between the second feed-point and the ground plane; and

setting the second switching device in the closed position, thereby grounding the second feed-point, and the first switching device is in the open position for enabling the first feed-point feeding so as to cause the second radiating element to produce a second resonance frequency substantially lower than the first resonance frequency and the third radiating element to produce a third resonance frequency generally higher than the first resonance frequency, or

setting the first switching device in the closed position, thereby grounding the first feed-point, and the second switching device is in the open position for enabling the second feed-point feeding, so as to cause the third radiating element to produce a fourth resonance frequency generally higher than the third resonance frequency.

19. The method of claim 18, wherein when the first switching device is set in the closed position and the second switching device is set in the open position, the first radiating element produces a fifth resonance frequency substantially equal to the third resonance frequency.

20. The method of claim 18, wherein the second resonance frequency is substantially in a frequency range of 880 MHz to 960 MHz.

21. The method of claim 18, wherein the first resonance frequency is substantially in a frequency range of 1710 MHz to 1880 MHz.

22. The method of claim 18, wherein the third resonance frequency is substantially in a frequency range of 1850 MHz to 1990 MHz.

23. The method of claim 18, wherein the fourth resonance frequency is substantially in a frequency range of 1920 MHz to 2170 MHz.

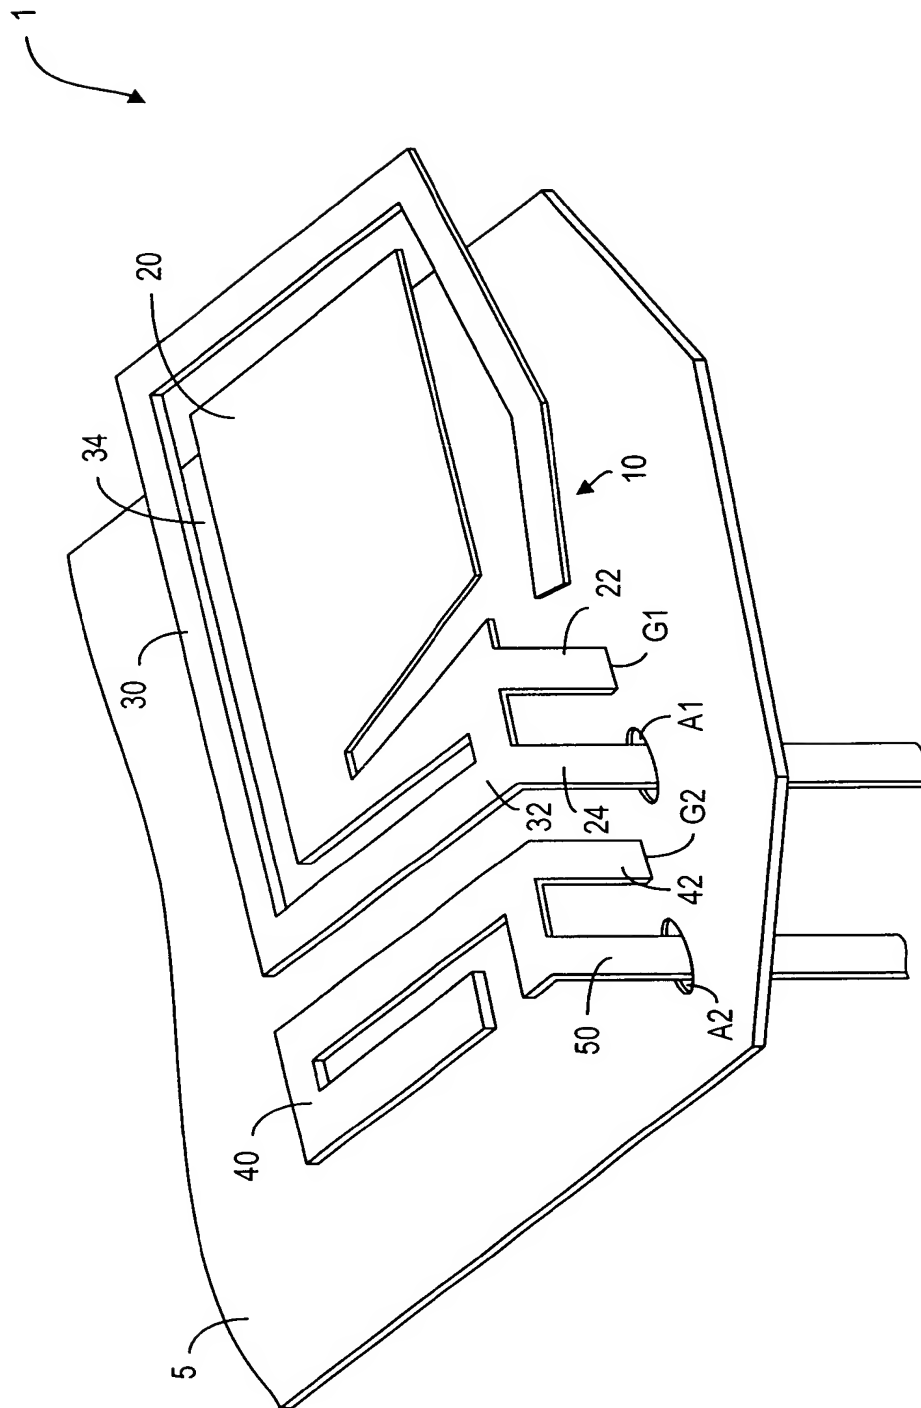


FIG. 1

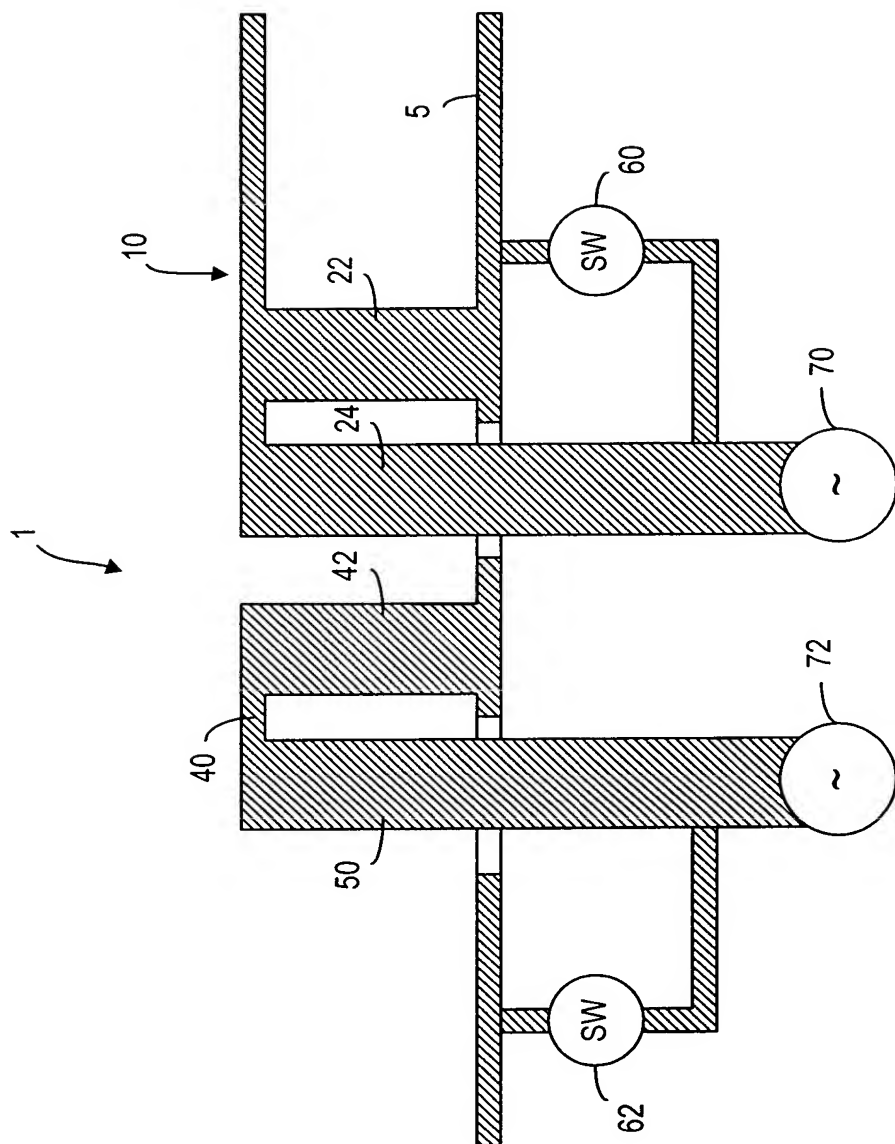


FIG. 2

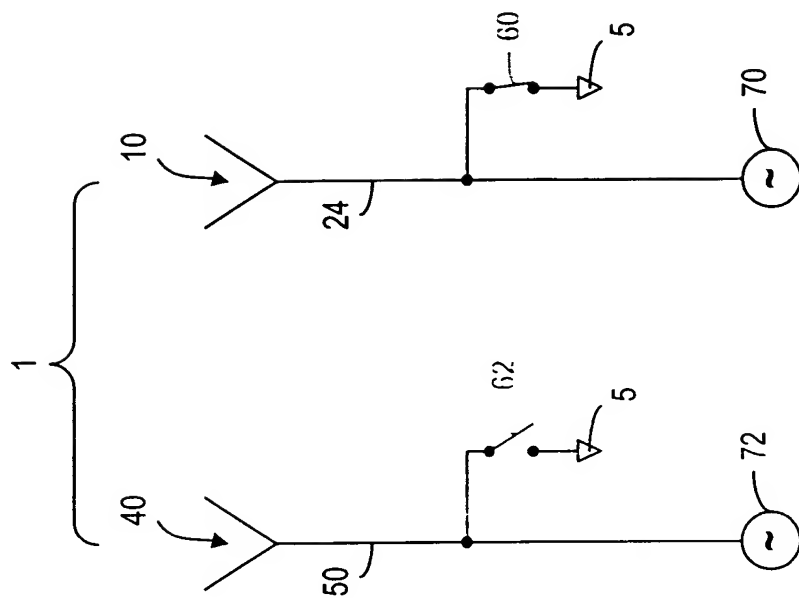


FIG. 3a

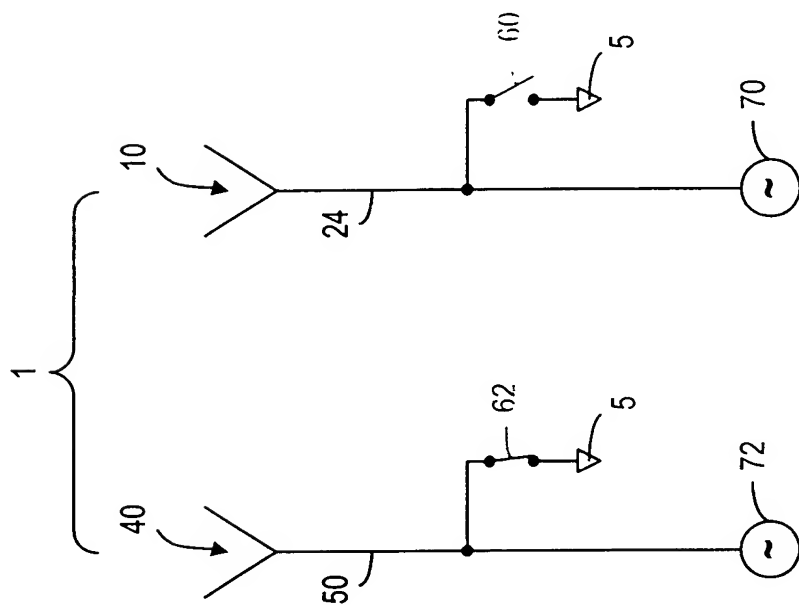


FIG. 3b



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 01 8601

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	WO 01 33665 A (JOHNSON GREG F ;KEILEN DON H (US); RANGESTAR WIRELESS INC (US)) 10 May 2001 (2001-05-10) * abstract; figure 5 *	1-23	H01Q5/00 H01Q1/24 H01Q9/04 H01Q1/36
A	WO 01 29927 A (SCHREIBER MICHAEL ;HUBER STEFAN (DE); SIEMENS AG (DE)) 26 April 2001 (2001-04-26) * figure 2B *	1-23	
A	EP 1 113 524 A (NOKIA MOBILE PHONES LTD) 4 July 2001 (2001-07-04) * abstract *	1,18	
A	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 12, 31 October 1998 (1998-10-31) & JP 10 190345 A (SHARP CORP), 21 July 1998 (1998-07-21) * abstract *	1,18	
A	EP 0 973 230 A (TOKYO SHIBAURA ELECTRIC CO) 19 January 2000 (2000-01-19) * figure 19 *	1,18	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H01Q
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 06, 22 September 2000 (2000-09-22) & JP 2000 068736 A (TOSHIBA CORP), 3 March 2000 (2000-03-03) * abstract *	1,18	
A	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 13, 30 November 1998 (1998-11-30) & JP 10 224142 A (KENWOOD CORP), 21 August 1998 (1998-08-21) * abstract *	1,18	
-/-			
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 26 September 2002	Examiner Johansson, R
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1501/03 03 02 (P/N001)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 01 8601

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 1 067 627 A (BOSCH GMBH ROBERT) 10 January 2001 (2001-01-10) * abstract *	1,18	
A	WO 01 20718 A (INTEGRA ANTENNAS LTD ;AVANTEGO AB (SE); ROWELL CORBETT (US)) 22 March 2001 (2001-03-22) * abstract *	1,18	
A	EP 0 993 070 A (NIPPON ELECTRIC CO) 12 April 2000 (2000-04-12) * abstract *	1,18	
A	EP 0 892 459 A (NOKIA MOBILE PHONES LTD) 20 January 1999 (1999-01-20) * abstract *	1,18	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 26 September 2002	Examiner Johansson, R
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : technological background O : non-written disclosure P : intermediate document X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (POC201)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 01 8601

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-09-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0133665	A	10-05-2001	WO 0133665 A1	10-05-2001
			US 2002070902 A1	13-06-2002
WO 0129927	A	26-04-2001	WO 0129927 A1	26-04-2001
EP 1113524	A	04-07-2001	FI 20001023 A	01-07-2001
			EP 1113524 A2	04-07-2001
			US 2001007445 A1	12-07-2001
JP 10190345	A	21-07-1998	NONE	
EP 0973230	A	19-01-2000	JP 11214917 A	06-08-1999
			EP 0973230 A1	19-01-2000
			US 6225958 B1	01-05-2001
			WO 9938227 A1	29-07-1999
JP 2000068736	A	03-03-2000	NONE	
JP 10224142 6	A		NONE	
EP 1067627	A	10-01-2001	EP 1067627 A1	10-01-2001
WO 0120718	A	22-03-2001	AU 7048300 A	17-04-2001
			EP 1228551 A1	07-08-2002
			WO 0120718 A1	22-03-2001
EP 0993070	A	12-04-2000	JP 2000114856 A	21-04-2000
			AU 5137999 A	06-04-2000
			CN 1254205 A	24-05-2000
			EP 0993070 A1	12-04-2000
			US 6255994 B1	03-07-2001
EP 0892459	A	20-01-1999	FI 972897 A	09-01-1999
			EP 0892459 A1	20-01-1999
			FI 981571 A	09-01-1999
			US 6140966 A	31-10-2000

EPO FORM P4453

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82